

## **NOOR ADAM GENERAL TRADING LLC**

TEL. +971 50 670 9796 / +971 55 676 7602 | Al Quoz Industrial 1 Street 18 Next to Berger Paint Shikh Ahmad Bin Khalifa

Bin Saeed Al Maktoum Warehouse No: 12 | EMAIL: [adamcarpetdubai@gmail.com](mailto:adamcarpetdubai@gmail.com) / [info@adamcarpetdubai.com](mailto:info@adamcarpetdubai.com)

## INTRODUCTION:

WELCOME TO NOOR ADAM GENERAL TRADING LLC!!

DUBAI IS KNOWN FOR ITS LUXURIOUS HOTELS, BEAUTIFUL ARCHITECTURE, AND OPULENT SHOPPING DESTINATIONS. BUT IT'S ALSO HOME TO SOME OF THE BEST CARPET STORES IN THE WORLD. AND ONE OF THE MOST POPULAR BRANDS AMONG DUBAI RESIDENTS IS ADAM CARPET. THE REASON FOR THIS SUCCESS IS SIMPLE: ADAM CARPET OFFERS HIGH-QUALITY CARPETS AT COMPETITIVE PRICES. PLUS, THE COMPANY ALWAYS PUTS CUSTOMER SATISFACTION FIRST. WHETHER YOU'RE LOOKING FOR A CARPET TO COVER A SINGLE ROOM OR AN ENTIRE FLOOR OR ANY EVENT ADAM CARPET HAS WHAT YOU NEED. ADAM CARPET HAVE AN EXPERT TEAM. OUR ADAM CARPET SERVICE HAS A LARGE STOCK OF BESTSELLING CARPETS IN DUBAI. SUCH AS

- **EXHIBITION CARPET**
- **VINYL FLOORING**
- **GRASS CARPET**
- **DELTA AND GALAXY CARPET**
- **MOSQUE CARPET**

IF YOU WANT TO BUY A CARPET AT A VERY REASONABLE PRICE AND ARE WORRIED ABOUT WHERE TO GO, PLEASE CONTACT US OR VISIT OUR WEBSITE <https://adamcarpetdubai.com/>

COME AND VISIT OUR WAREHOUSE LOCATED AT AL QUOZ INDUSTRIAL 1 STREET 18 NEXT TO BERGER PAINT SHIKH AHMAD BIN KHALIFA BIN SAEED AL MAKTOUM WAREHOUSE NO: 12

## FOR YOUR FUTURE INQUIRIES:

TEL NO. +971 50 670 9796 / +971 55 676 7602 / EMAIL: adamcarpetdubai@gmail.com / info@adamcarpetdubai.com

## SERVICES OFFERED



EXHIBITION SERVICES

<https://adamcarpetdubai.com/project/exhibition-carpet/>



GRASS CARPET WORK

<https://adamcarpetdubai.com/project/grass-carpet/>



VINYL FLOORING WORK

<https://adamcarpetdubai.com/project/vinyl-flooring/>



MOSQUE CARPET WORK

<https://adamcarpetdubai.com/project/mosque-carpet/>

# CARPETS COLORS AND SPECIFICATIONS

## GALAXY CARPETS



GLX 53



GLX 84



GLX 435



GLX 825



GLX 921



GLX 924



GLX 111



GLX 216



GLX 213



GLX 216



GLX 219



GLX 322



GLX 329



GLX 412



GLX 415



GLX 424



GLX 428



GLX 448



GLX 511



GLX 514



GLX 620



GLX 626



GLX 723



GLX 728



GLX 818



GLX 822



**SPECIFICATION:**

<b>STYLE</b>	<b>GALAXY</b>
<b>CONSTRUCTION</b>	<b>CUT PILE</b>
<b>FIBER</b>	<b>PP HEAT SEAT FRIEZE</b>
<b>DENIER</b>	<b>1450X2 / DENIER</b>
<b>YARN TYPE</b>	<b>FRIEZE</b>
<b>GAUGE</b>	<b>1 / 8</b>
<b>DYE METHOD</b>	<b>SOLUTION DYED</b>
<b>PILE HEIGHT</b>	<b>6.0 MM</b>
<b>TOTAL PILE HEIGHT</b>	<b>8.0 MM</b>
<b>STITCHES / 10CM.</b>	<b>31.0</b>
<b>TUFTED WEIGHT / M2</b>	<b>630 GRMS (+ / - 5%)</b>
<b>TOTAL WEIGHT / M2</b>	<b>1650 GRMS (+ / - 5%)</b>
<b>PRIMARY BACKING</b>	<b>WOVEN POLYPROPYLENE</b>
<b>SECONDARY BACKING</b>	<b>A BACK (WOVEN POLYPROPYLENE)</b>
<b>WIDTH</b>	<b>3.66 OR 4.00M</b>
<b>DENSITY / M2</b>	<b>97650 / M2</b>

DELTA WIDTH 3.66M



DL 112



DL 120



DL 127



DL 128



DL 140



DL 142



DL 146



DL 149



DL 155



DL 156



DL 157



DL 158



DL 163



DL 166



DL 177

Pick up where you le  
We have opened you  
To change this behavi



DL 178



DL 179



DL 186



DL 191



DL 193



DL 196



DL 197

**SPECIFICATION:**

STYLE	DELTA
CONSTRUCTION	LOOP PILE
FIBER	100% POLYPROPYLENE
DENIER	1500 / DENIER
YARN TYPE	POLYPROPYLENE
AGAUGE	1 /10
DYE METHOD	SOLUTION DYED
PILE HEIGHT	3.50 – MM.
TOTAL PILE HEIGHT	5.0 – MM.
STITCHES / 10CM.	40.0
TUFTED WEIGHT / M2	300 GRMS. / SQM. (+ / - 5%)
TOTAL WEIGHT / M2	12050 GRMS. / SQM. (+ / - 5%)
PRIMARY BACKING	WOVEN POLYPROPYLENE
SECONDARY BACKING	ACTION BACK (WOVEN POLYPROPYLENE)
WIDTH	3.66 OR 4.00 MTR.
DENSITY / M2	158000 / M2
FLAMMABILITY	ASTM D -2859-96&CPSC FF-170) 8 PASSES
STATIC PROPENSITY	UNDER 3 KV
SMOKE DENSITY	LESS THAN 450

EXHIBITION WIDTH 3M



4950



4963



4965



1333



4871



4964



4981



4877



4968



4920



4912



1335



4872



4959



4849



4894



4873



0618



4966



0200



4962



1320



4893



4897



4870



4876



4899



4961



PRECOAT



PROTECT



**SPECIFICATION:**

<b>STYLE</b>	<b>EXPO</b>
<b>MANUFACTURING PROCESS</b>	<b>NEEDLE FELT</b>
<b>SURFACE ASPECT</b>	<b>FLAT</b>
<b>PILE COMPOSITION</b>	<b>100% POLYPROPYLENE</b>
<b>PILE WEIGHT</b>	<b>250GRM / M2 ±10%</b>
<b>TOTAL WEIGHT</b>	<b>760GRM / M2 ±10%</b>
<b>PRIM. BACKING</b>	<b>STYR. BUT LATER FILLED WITH CALCIUM CARBONATE</b>
<b>SEC. BACKING</b>	<b>PRECOAT</b>
<b>TOTAL HEIGHT</b>	<b>2.6MM ±10%</b>
<b>PERMANENTLY ANTISTATIC</b>	<b>ISO 6356</b>
<b>TO / RUBBING</b>	<b>4 EXCEPT FOR RED 3 COLOURS</b>
<b>FLAMMABILITY</b>	<b>CFL - S1</b>
<b>GRADING</b>	<b>EXPO - EXHIBITION</b>

## CARPET TILES AND SPECIFICATIONS

### GRAND CARPET TILE



G12



G02




G27



G35





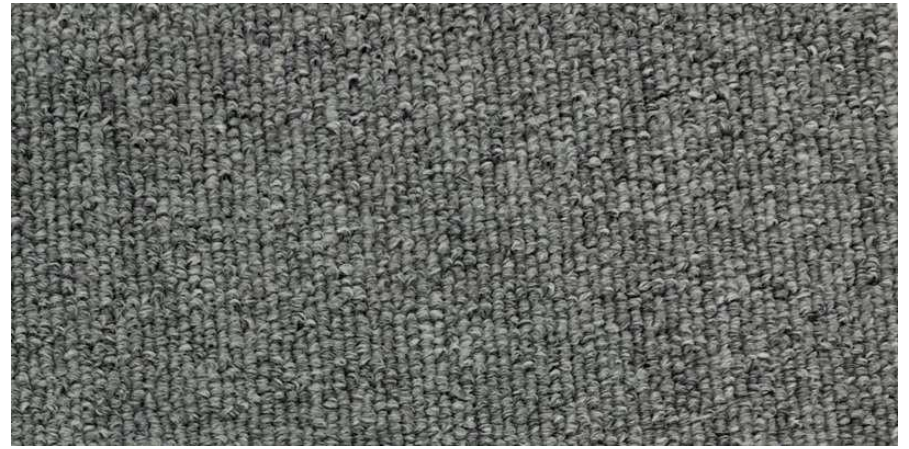







G06




G01

# Product Name:Grand

SPECIFICATION	
Construction: Loop Pile	Pile Height: 3.0±0.5mm
Pile Fiber Composition: 100% Polypropylene	Total Thickness: Approx 5.0mm
Tufting Gauge: 1/10"	Primary Backing: Polyester Spunbonded
Dye Method: Solution Dyed	Backing Structure: Glass Reinforced PVC
Pile Weight: 450g/m <sup>2</sup>	Tile Size: 500mm X 500mm
 <p>Static Electricity Permanent Lifetime Protection-less than 3.5kv.</p>  <p>Lodging-resistant superior resilience of fiber,suitable for wheels.</p>  <p>Anti Rubbing and feet trample because of fiber's properties</p>  <p>Dimensional Stability Warranted not to change in size by more than 0.5mm in normal use will nor dome or dish in normal use.</p>  <p>Colour Fastness to Rubbing According to GB/T3920-2008 standards it is ≥ Grade 4 for dry rubbing ≥Grade 3 for wet rubbing.</p>	 <p>Superior Sound insulation effect</p>  <p>Anti-soil Treatment Soil resistance treatment.</p>  <p>Wear Warranty Product is warranted not to lose more than 15% pile fiber by weight in normal commercial use within 15 years.</p>  <p>Installation Tackifier or releasable Adhesive Recommended.</p>  <p>Sustainability All yarns used are Solution dyed to minimize use water And exclude any effluent production. ISO14001 and ISO9001.</p>



# NEW YORK “A” CARPET TILE

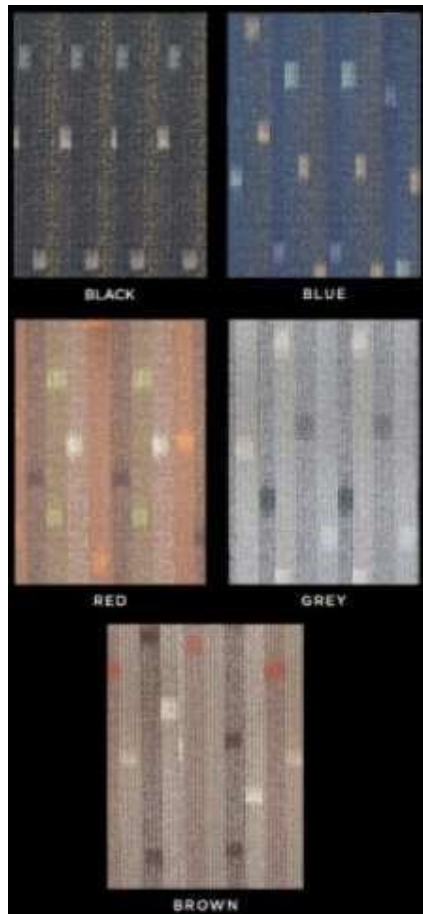

## STYLE SPECIFICATION

Construction	Multi Level Loop
Composition	100%Universal Nylon6.6
Dye Method	Solution Dyed
Stitch Count	9 per inch
Pile Weight	720 gr
Total Weight	4.95 (+- 0.15kg/m <sup>2</sup> )
Average Pile Height	4mm (+-0.5mm)
Backing	PVC with Fiberglass
Tile Size	50cm x 50cm
Flammability Pile Test	Passes DOC FF 1-70 7 of 8 Pass
Anti Static	Passes Static Load CNS 13954-7 10.2%
Wear Classification	Heavy Duty
Wear Resistance	Abrasion-CNS 13595-9>40gm
Packing	20 pcs carton (5m <sup>2</sup> )
Machine Gauge	1/16
Tuft Bind	Passes CNS 13595-62.7 KGF
Color Fastness	Passes Light Test -AATCC 16E Rating 4

# PLATINUM "A" CARPET TILE



# PVC VINYL FLOORING AND SPECIFICATIONS



508



532



576



584



592



594



595



599

## CONCRETO "A" PVC VINYL FLOORING

### STYLE SPECIFICATION

Europese classificatie	Wonen normal
Total thickness	ca.3,00 mm
Wearlayer	ca. 0.20 mm
Wearlayer treatment	Pu /Natural Feel
Total weight	ca. 1.850 gr/m <sup>2</sup>
Slip Resistance	DS
Slip restraint	R 11
Inflammability	Cfl-S1
Acoutical insulation	18 db
Underfloor Heating	Suitable
Width	4.00m





PACAN 549



AVORIA Z 582



AVORIA Z 587



NELSON 712



NELSON 767



PACAN D 545



TAVEL T71



TAVEL T51



TAVEL T57

## STYLE SPECIFICATION

Total thickness	ca.2.00 mm
Wearlayer	ca. 0.20 mm
Total weight	ca. 1.450 gr/m <sup>2</sup>
Thermal conductivity	0,25 W/mk
Resistance	0,0080 m <sup>2</sup> K/M
Slip Resistance	DS
Formaldehyde Groug	E1
Inflammability	Cfl-S1
Acoustical insulation	18 db
Underfloor Heating	Suitable-Geschikt-Adapte-Geeignet
Wearlayer treatment	Natural Feel
Width	4.00m
Sliprestraint	R10
Thermal condutivity	.0.25 W/mk

# NAYA "M" PVC VINYL FLOORING



CAMARGUE 504



CAMARGUE 549



CAMARGUE 593



CAMBRAI 548



CHIANTI 562



CIMARRON 503



CIMARRON 596



ELM 542



LUBERON 794



NIMES 585



NOMAD 543



PECAN D 545



ROZEL 534



ROZEL 592



SCENT WOOD 504




TORONTO 531

## SPECIFICATION:

PRODUCT NAME	NAYA
TOTAL THICKNESS	2.00MM
WEARLAYER	NATURAL FEEL
WIDTH	4M
SLIP RESISTANCE	DS
INFLAMMABILITY	Cfl-S1
SLIP RESTRAINT	R10*
ACOUSTICAL INSULATION	15Db
THERMAL CONDUCTIVITY	0.25 W/mK
THERMAL RESISTANCE	0.008m2K/W
RESISTANCE TO HOUSEHOLD CHEMICALS	VERY GOOD


PLAIN "M" PVC VINYL FLOORING

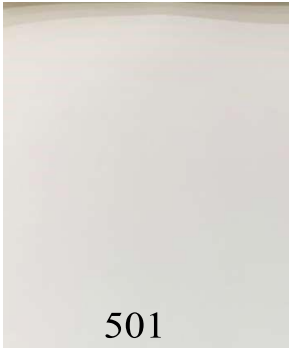

501



518

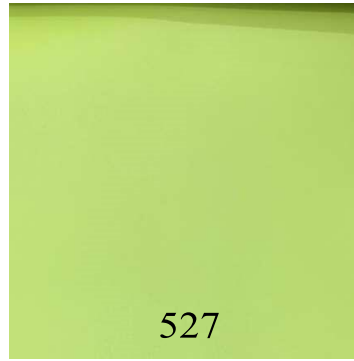

527




556




566




574

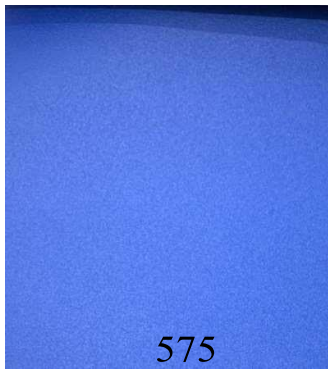


575

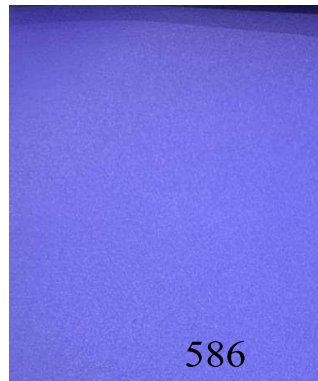


586

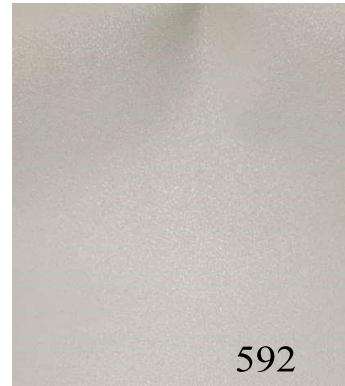

592

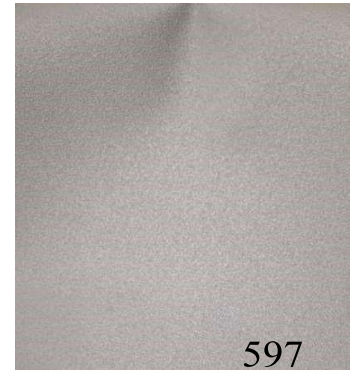

597

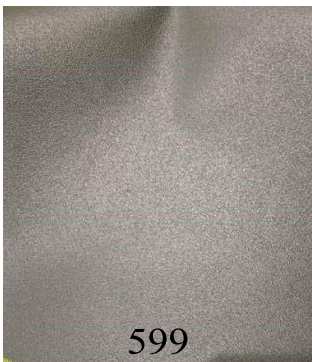

599



512




570

SPECIFICATION:


PRODUCT NAME	EVENTS
TOTAL THICKNESS	3.00MM
WEARLAYER	0.25MM
WIDTH	4M
STANDARD LENGTH	30M
INFLAMMABILITY	Bfl-S1
SLIP RESISTANT	DS
ACOUSTICAL INSULATION	18Db
UNDERFLOOR HEATING	SUITABLE
WEIGHT OF ROLL	Ca 118KG
RESISTANCE TO HOUSEHOLD CHEMICALS	VERY GOOD



# NOOR ADAM GENERAL TRADING LLC

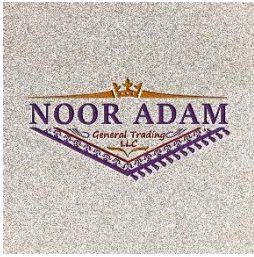

White - 5516029

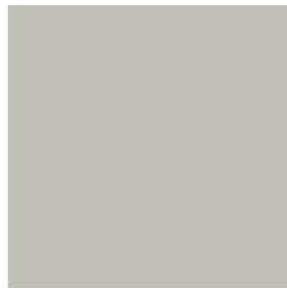

Grey - 5516014



Black - 5516013



Red - 5516017



Denim Blue - 5516218



Grass Green - 5516255

## uni collection START

\* Vinyl floor covering

The economic and practical solution for your home !  
The START uni collection has six beautiful designs that will make your daily life easier thanks to easy styling and simple care.


### TECHNICAL CHARACTERISTICS:

ISO 10874		Classification - residential	
ISO 24345		Total thickness	2,00 mm
ISO 24340		Wear layer thickness	0,13 mm
ISO 23997		Total weight	1,35 kg/m <sup>2</sup>
ISO 24341		Roll width	4 m
ISO 24341		Roll length	30m
ISO 24343		Residual indentation	≤ 0,35 mm
ISO 23999		Dimensional stability	≤ 0,1%
EN 13501-1		Fire resistance	
ISO 105 B02 - Method 3		Light fastness (blue scale)	7/8
ISO 1717/2		Sound absorption	20 dB
EN 12524		Floor heating suitability*	<input checked="" type="checkbox"/>

\*the temperature at the surface of the floor should not exceed 27°C.

Floor must be glued across whole surface

### PRODUCT STRUCTURE:

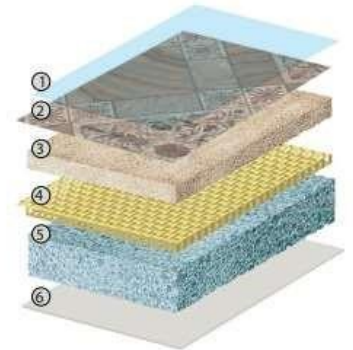

1. Protective layer
2. Design
3. Top compact
4. Glass fiber
5. Foam backing
6. Back print





GRASS  
CARPET



GRASS  
20MM  
FULL  
GREEN  
GRASS  
25MM  
BROWN  
GREEN





GRASS 35MM  
BROWN GREEN  
GRASS 40MM  
FULL GREEN  
GRASS 7MM  
DARK GREEN  
GRASS 10MM  
DARK GREEN



GRASS 7MM RED



GRASS 7MM BLUE